

Catalogue
FOOD SERVICE
Chapter
COOKING

Specific model
F-E7208 400V 3N 50/60Hz 2C

19072444 28/10/2025

DENOMINATION:

Electric fryer, 2 tanks of 8 L, 700 range.

DESCRIPTION :

"- Surface tops manufactured in 1.5 mm thick AISI-304 stainless steel.
- Laser-cut joints, automatic welding and polishing Hidden screws.
- Wells built into the surface top with robotic welding and polishing.
- Cold area in the lower part of the well which helps to preserve the characteristics and quality of the oil used for longer.
- Thermostatic temperature control, between 60 and 200 °C.
- Safety thermostat in all models.
- Fitted with individual lids for each well.
- High power machines that heat up quickly and have a high power - litre ratio (up to 1.00 kW/litre)."
"- Countertop model.
- Drainage of oil from the well through a mechanical ball valve which is robust, reliable and resistant to high temperatures. The discharge control is located in the control panel."
- Electric models with AISI 304 stainless steel heating elements located inside the well which can be tilted by over 90º to ensure perfect cleaning.

POSSIBLE OPTIONS :

- 230 1N- Transformation A 230 V single phase
- 230 III - A 230 V three-phase transformation without neutral
- MARINE - Other machines - Ship transformation - 440 III


POSSIBLE ACCESSORIES :

- FOOD SERVICE
- ACCESSORIES KORE
- STANDS 700

SUPPLIED ACCESSORIES:

- 12237851 Basket F-E708 2

DIMENSIONS



X Width	800 mm	X Gross width	840 mm
Y Depth	730 mm	Y Gross depth	822 mm
Z Height	290 mm	Z Gross height	535 mm
Net Weight	46,0 kg	Gross Weight	64,0 kg
Net volume	0,170 m3	Gross volume	0,369 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	12,000 kW
Voltage	400V
Phases	3N
Electric frequency	50/60Hz
Amperage (A)	17,4A
Heating power	12,00 kW

CONNECTIONS TECHNICAL SPECIFICATIONS

230 V three-phase wiring	2 X (3X2,5MM²+T)
Single-phase 230V wiring	2 X (2X4MM²+T)
Three-phase +N 400V wiring	2 X (3X1,5MM²+T+N)

OTHERS

IPX	IPX5




Catalogue
FOOD SERVICE
Chapter
COOKING


Specific model
F-E7208 400V 3N 50/60Hz 2C

19072444 28/10/2025

F-E7108

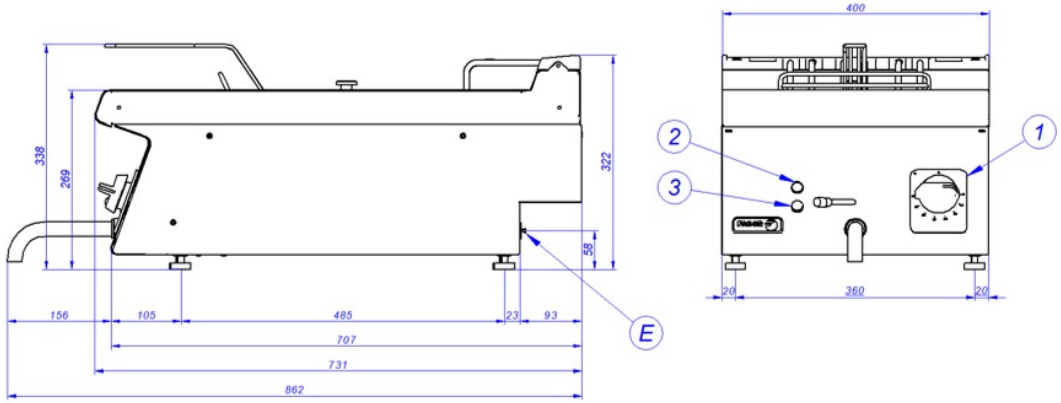

F-E7208

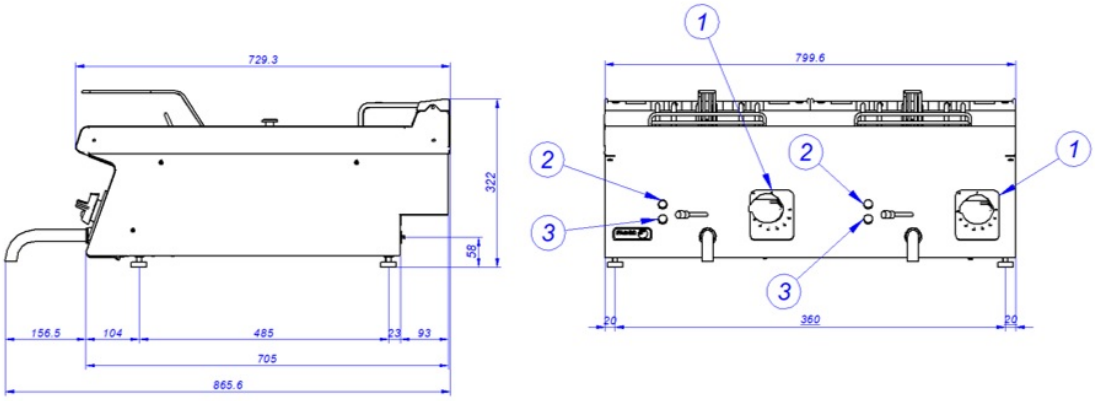

E – Conexión eléctrica	Electrical connection	Connexion électrique
Q – Conexión equipotencial	Equipotential connection	Connexion équipotentiel
1 – Mando termostato	Thermostat control	Commande de thermostat
2 – Piloto verde	Green pilot	Lumière verte
3 – Piloto ámbar	Ambar pilot	Lumière ambre