

**Catalogue**
FOOD SERVICE
**Chapter**
OVENS

**Specific model**
K-APW-061-E R SW K 400V 3N 50/60Hz

19103865 14/07/2025

**DENOMINATION:**

iKORE Kompact PureSteam (boiler) oven with intelligent wash for 6 GN 1/1 electric trays with right opening and connectivity.

**DESCRIPTION :**

FUNCTIONS:
- FagorTouch: 10.1" (7"" on 0623 oven and Kompact versions) glass state of the art touch screen for easy and intuitive operation
- iCooking: Smart cooking process with automatic adjustment:
  . Options at the end of the cooking process: maintain temperature, repeat cooking process, etc.
  . Ability to modify smart cooking processes in progress and adjust parameters at any time
- iFunctions: Intelligent cooking processes with automatic adjustment (regeneration, sous vide, overnight cooking, fermentation, pas teurisation, smoking, charcuterie and dehydration). Smart cooking processes with automatic adjustment
- iClima:
  . Humidity management and control by means of direct measurement with a humidity sensor
  . 1% regulation capacity
- Fagor Cooking Center:
  . 200 factory preset and culinary tested recipes
  . Ability to manage your favourite recipes
  . Unlimited 9-stage recipe storage capacity
- Air and water cool-down (rapid cabinet cooling function)
- Multitray
- Cooking modes: low temperature steam 30-98º, steam 99º, super steam 100- 130º, mixed 20-300º and convection 20-300º
- Chamber dehumidification for crispy roasts
- DeltaT cooking for delicate cooking


PURESTEAM:
- Higher steam saturation in the chamber than an injection oven
- Pure steam generator with automatic filling function
- Impurities in the water are deposited in the boiler, facilitating the maintenance of the oven and an impurity-free cooking chamber.
- Steam generator equipped with limescale detector.

Automatic and adjustable emptying of the generator every 24 hours of cooking.
- Limescale detection system
- Semi-automatic descaling system
- Guided descaling programme

CONTROLS:
- EasyCooking: option to configure the programmes by password
- Languages: 36
- Ability to configure screen tone, volume and contrast
- Tones: 8
- Power, network and language settings
- Integrated help functions and instruction manual
- Control and monitoring of the equipment from mobile devices via FagorKonnect
- SAT and Trade fair mode

EQUIPMENT FEATURES:
- Stop/start function
- EZ-Sensor: Internal probe with 4 measuring locations
- Positioning aid for temperature sensor
- Manual steam injection

**DIMENSIONS**




| | | | |
|---|---|---|---|
| X Width | 520 mm | X Gross width | 579 mm |
| Y Depth | 810 mm | Y Gross depth | 918 mm |
| Z Height | 760 mm | Z Gross height | 927 mm |
| Net Weight | 87,0 kg | Gross Weight | 102,0 kg |
| Net volume | 0,320 m3 | Gross volume | 0,493 m3 |

**ELECTRICITY TECHNICAL SPECIFICATIONS**

| | |
|---|---|
| Electric power | 7,400 kW |
| Voltage | 380-415V |
| Phases | 3N |
| Electric frequency | 50/60Hz |
| Amperage (A) | 17A |
| Engine power | 0,40 kW |
| Heating power | 7,00 kW |

**WATER TECHNICAL SPECIFICATIONS**

| | |
|---|---|
| Pressure | H2O: 200-400kPa(2-4bar) |
| Water max consumption | 10,00 L/h |
| Maximum Temperature | Water Inlet Max Temp:60ºC |

**CONNECTIONS TECHNICAL SPECIFICATIONS**

| | |
|---|---|
| 230 V three-phase wiring | 3X4MM²+T |
| Single-phase 230V wiring | 3X6MM²+T |
| Three-phase +N 400V wiring | 3X2,5MM2 +N+T |
| Safety differential | 300 mA |
| Water inlet diameter | 3/4´´ |
| Cold softened water 1 diameter | 3/4´´ |
| Drain 1 diameter | 40 |

**OTHERS**

| | |
|---|---|
| Door opening | Right |
| IPX | IPx4 |



**Catalogue**
FOOD SERVICE
**Chapter**
OVENS

**Specific model**
K-APW-061-E R SW K 400V 3N 50/60Hz

19103865 14/07/2025

- Automatic dehumidification system
- Variable humidification with 5 levels
- 6 programmable air circulation speeds (from 1400 rpm to turbine stop)
- Option to switch from ºC to ºF
- Energy consumption display
- Display of actual values and selected values
- Delayed programming
- JIT (just in time) programming
- Ability to select 1/2 power
- Automatic adaptation to the characteristics of the installation site (altitude, etc.) including initial self-testing
- Automatic boiling point adjustment
- Removable fan cover
- Integrated turbine brake for increased safety
- HA-Control: bidirectional turbine that provides intelligent even heat distribution
- Auto-reverse system for reversing fan rotation
- Triple-glazed, ventilated cooking chamber door (all except 0623 and Kompact)
- Special heat-reflective coating and hinged inner panes for easy cleaning
- LED lighting in the cooking chamber
- HOLD-OPEN DOOR systems (3 door locking positions for user safety)
- Proximity contact door switch
- Easily replaceable gasket insert
- Interior and outer material: AISI 304 stainless steel (interior mirror polished)

CERTIFICATION AND INSTALLATION SYMBOLS:
- EC declaration of conformity
- EC declaration of gas conformity
- CB safety
- IPX5 protection against splashes and jets of water
- Height adjustable equipment feet (all except 0623 and Kompact)
- Monitor App and maintenance App (self-diagnosis of warnings and errors)
- Logging App:
  . Cycle history
  . Error history

FAGORKONNECT:
- Wi-Fi and ETHERNET connection as standard
- Functions when the oven is connected or not to the internet.

WASHING SYSTEM:
- iWashing (environmentally and economically efficient)
- Choice of iWashing Solid or iWashing Liquid smart washing systems
- Washing programmes:
  . 1 basic cleaning programme (spray)
  . 3 automatic cleaning programmes
  . 1 rinsing programme
  . 1 polishing programme
- Option to activate dirt softening during the cleaning process
- Option to activate drying in the cleaning process
- Indication of cleaning status and remaining time
- Control and monitoring of the cleaning process from mobile devices via FagorKonnect
- Connectivity (K) included (Wi-fi and Ethernet).

**SPECIFIC OPTIONS :**

- ELECTRIC POWER : 400V 3N 50/60HZ - 061



**Catalogue**

FOOD SERVICE

**Chapter**

OVENS

**Specific model**

K-APW-061-E R SW K 400V 3N 50/60Hz

19103865 14/07/2025

- FUSE DEFINITION : K-061 E
- BRAND : FAGOR
- DOOR OPENING : R RIGHT
- WASHING SYSTEM : SW-IWASHING SOLID
- SHOWER : NO
- SOUS VIDE & THERMAL PROBE : NO
- CONNECTIVITY : K-WITH IOT CONNECTIVITY
- CERTIFICATION : CE
- REG4 : NO REG4

**POSSIBLE ACCESSORIES :**


- EXHAUST HOOD
- VARIOUS
- ACCESSORIES OVENS
- SPECIFIC FOR 0623
- COOKING ACCESSORIES O



**Catalogue**
FOOD SERVICE
**Chapter**
OVENS

**Specific model**
K-APW-061-E R SW K 400V 3N 50/60Hz

19103865 14/07/2025

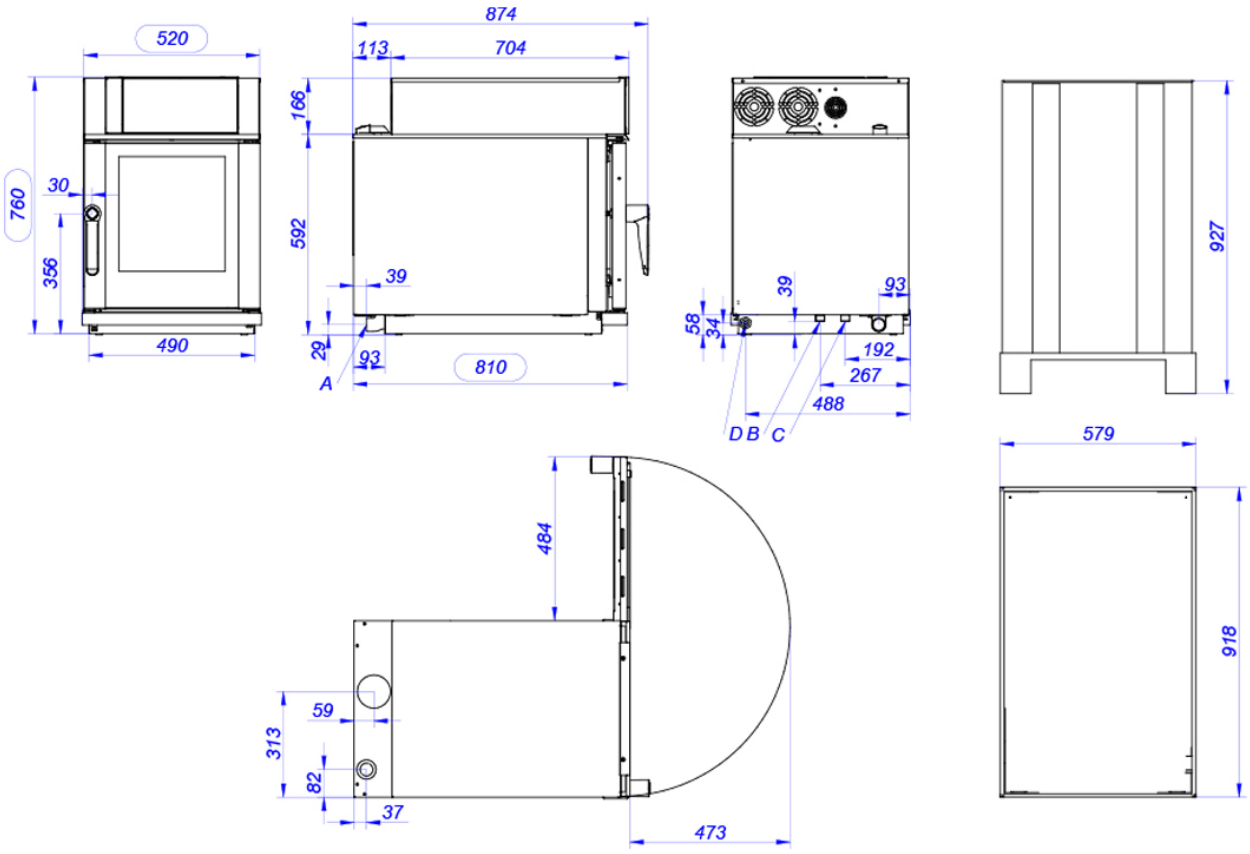


A: DESAGUE DN40
B: ENTRADA DE AGUA BLANDA
C: ENTRADA DE AGUA BLANDA
D: ALIMENTACIÓN ELÉCTRICA
E: ETHERNET
A: ÉGOUTTER DN40
B: ENTRÉE D'EAU DOUCE
C: ENTRÉE D'EAU DOUCE
D: PUISSANCE
E: EHERNET
A: DRAIN CONNECTION DN40
B: SOFT WATER CONNECTION
C: SOFT WATER CONNECTION
D: ELECTRICAL SUPPLY
E: ETHERNET
A: ABLASSEN DN40
B: WEICHEM WASSERZULAUF
C: WEICHEM WASSERZULAUF
D: POWER
E: ETHERNET
A: SCARICO DN40
B: INGRESSO DELL'ACQUA DOLCE
C: INGRESSO DELL'ACQUA DOLCE
D: POTENZA
E: ETHERNET