# VALIDO EVO

## mod. 635LA EM - 635LA TOUCH

MAX TEMP
400 °C

ø 35



A

UPWARD DOOR OPENING

EM

ELECTROMECHANICAL CONTROLS






TOUCH

TOUCH SCREEN CONTROLS

• Pizzas' diameter 35 cm (12") • Baking: direct on firestone or indirect in baking trays • Models for 4/6/9 pizzas • Modularity up to 3 decks • Max temperature 400 °C • Electronic controls with manual adjustment or Touch screen controls • Thermostatic adjustment of temperature through electronic control (1°C accuracy) • Control panel cooled by forced ventilation • Front part and door in stainless steel. Wide tubular stainless steel handle • Panoramic pyroceram door glass, available with downward or upward opening • Baking chamber in stainless steel • Baking surface made in 19 mm alveolar refractory stone • Chamber lowering device to save energy • High thermal resistance insulation in ceramic fiber and eco-friendly rock wool • Internal lighting with halogen lamp • Adjustable smoke exhaust, external chimney included.


Optionals

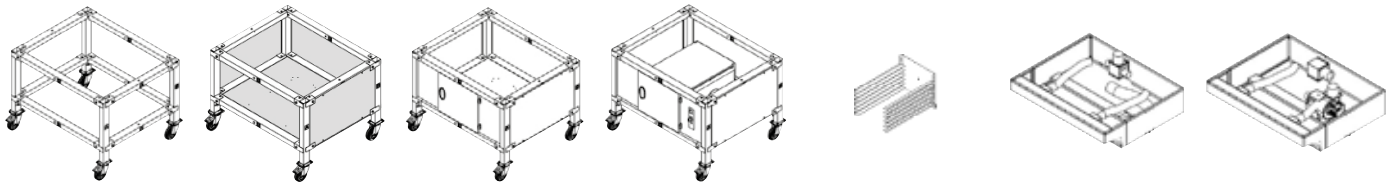

# mod. 635LA EM - 635LA TOUCH

| Mod.<br>Cod. | Produttività oraria<br>Hourly output<br>Production horaire<br>Produktivität Pro Stunde<br>Productividad por hora | kW Max*<br>kW/h** | Alimentazione***<br>Supply***<br>Alimentation***<br>Alimentación***<br>Anschluss*** | Dim. camera cottura/ Esterne (L x P x A)<br>Inside/Outside dim. (W x D x H)<br>Dim. intérieures extérieures (L x P x H)<br>Innenmasse Außenmasse (B x T x H)<br>Dim. internas externas (A x P x A) | Dim. Imballo-m³ (L x P x A)<br>Package dim.-m³ (W x D x H)<br>Dim. Emballage-m³ (L x P x H)<br>Verpackung-m³ (B x T x H)<br>Dim. Embalaje-m³ (A x P x A) | Peso netto Peso Lordo<br>Net weight Gross Weight<br>Poids net Poids Brut<br>Nettogewicht BruttoGewicht<br>Peso neto Peso Bruto |
|---|---|---|---|---|---|---|
| | - | | Volt Hz Ph - Amp | cm | cm / m³ | kg |
| **635LA EM**<br>OM07810<br><br>**635LA TOUCH**<br>OM07840 | 6 ø 35 - 54/h<br>2 ø 45 - 10/h<br>2 60x40 - 6/h | 15,1<br>5,7 | 400 50 3N - 20,9 | **113,6 x 73,8 x 10÷14**<br>146 x 97,2 x 39 (+19)**** | 165 x 133 x 56<br>1,2 | 156 / 181 |

*kW Max = Potenza nominale (massima installata utilizzabile) - **kW/h = Consumo medio orario - ***Voltaggi speciali a richiesta - ****Sporgenza camino
*kW Max = Power rating (maximum available installed power) - **kW/h = Average hourly consumption - ***Special voltages available upon request - ****Flue projection
*kW Max = Puissance nominale (maximale installée utilisable) - **kW/h = Consommation horaire moyenne - ***Voltages spéciaux sur demande - ****Saillie de la cheminée
*kW Max = Nennleistung (Maximal installierte nutzbare Leistung) - **kW/h = Durchschnittlicher Stundenverbrauch - ***Auf Wunsch: besondere Spannungen - ****Kamin-Vorsprung
*kW Max = Potencia nominal (màxima instalada disponible) - **kW/h = Consumo medio por hora - ***Voltajes especiales disponibles - ****Saliente de la chimenea

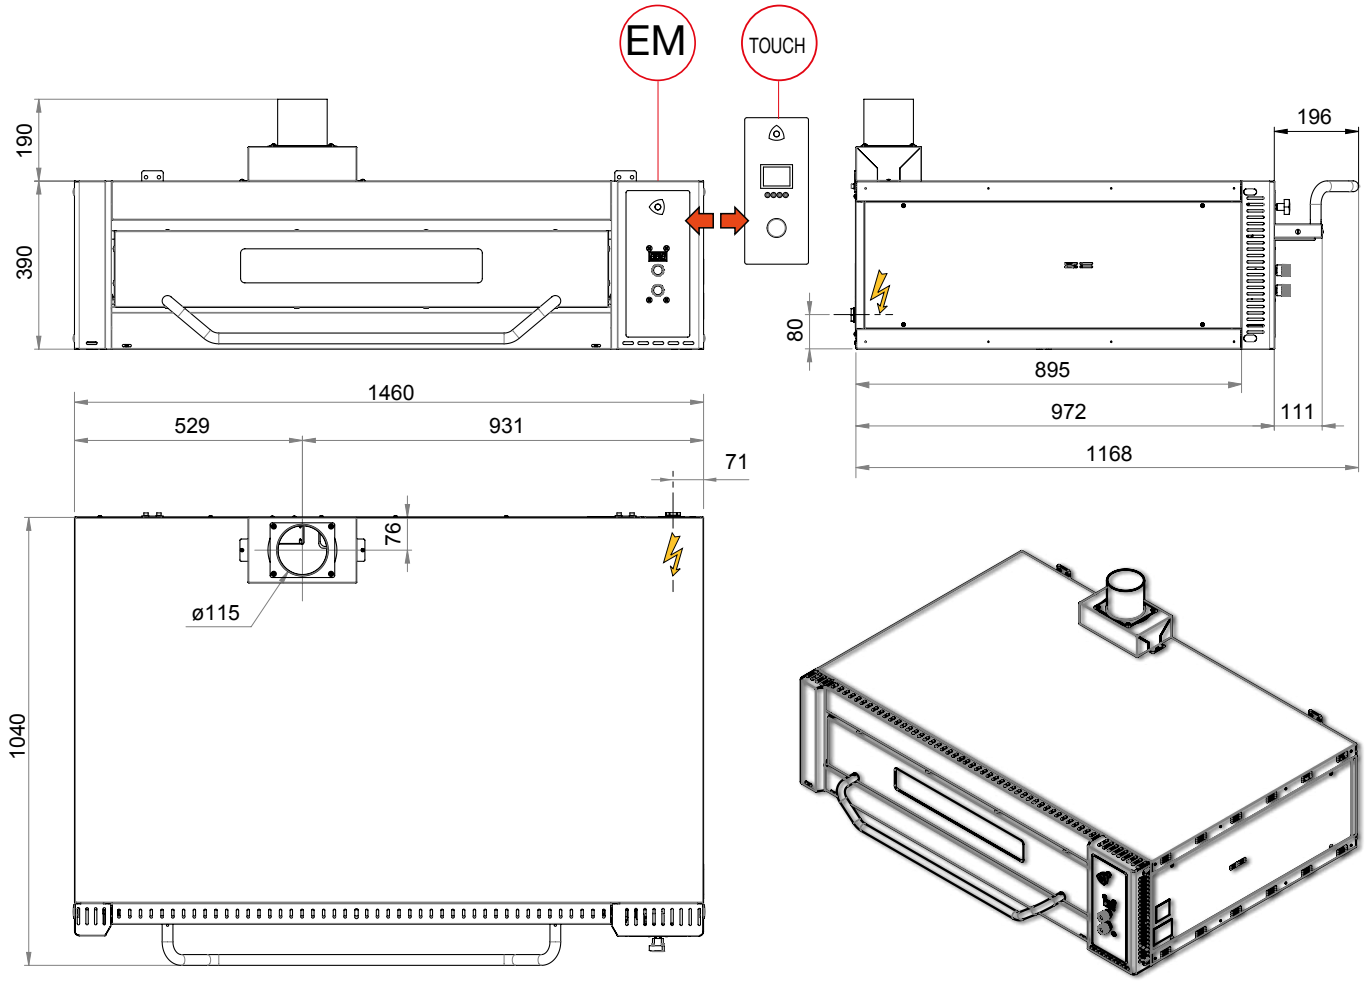


The specifications shown in this document are to be considered not binding. OEM Ali Group S.r.l. reserves the right to make technical changes at any moment.

**Oem Ali Group S.r.l. a Socio Unico** Viale Lombardia, 33 - Bozzolo (MN) - T +39 0376 910511 - F +39 0376 910545 - info@oemali.com - www.oemali.com