LÖLSBERG

Operating and fitting instructions for i.Scoop*Shower* spray rinsing devices for ice-cream scoops and dishers

All i.Scoop*Shower* spray rinsing devices and components have to be exclusively applied for cleaning purposes for ice-cream scoops and dishers. Any other application is not appropriate.

Operating instructions:

- The water valves at the top and bottom are opened by pressing the disher on the spherical head. The disher is always rinsed with fresh water from above and below. Dirty washing water runs away immediately. The water on the inside of the scoop is swirled around. This rinses off the food residuals. On removing the scoop from the spherical head the water valves are automatically closed again by the water pressure.
- **Let system run continuously for 1 minute at least once a day before starting operation and after finishing operation for the day!**
- **Rinse disher until only clean water runs down along the spray rinsing unit!**
- Do not use the overflow pipe during daily operation. Application of the overflow pipe only for cleaning purposes. **The water discharge holes are not allowed to stand in dirty water.** The tap-off section and straining disc can be removed to clean the rinsing device.
- **Clean/sanitize complete spray rinsing device at least once every day and disassemble spray rinsing unit in sufficient time intervals to clean/sanitize/decalcify it from inside and outside (don't use "aggressive" detergents, cleansers, bleaches, decalcifiers, etc.)!**

Fitting instructions:

- **The i.ScoopShower spray rinsing devices are to be installed with adequate backflow protection to comply with applicable federal, state, and local codes!**
- **Install a water pressure reducer if necessary (recommended water pressure 2-3 bars / 29-43 psi) and a ball tap!**
- **Check correct fitment of all threads incl. NPT-adapters and installation according to your local technical regulations and norms and make sure there are no leakages before using the system!**
- **Close the water supply line during night and/or absence!**
- **Ensure at all times a free water drainage in order to avoid the water discharge holes from being contaminated towards the inside (don't use "aggressive" detergents, cleansers, bleaches, decalcifiers, etc.)!**
- **Let system run continuously for at least 3 minutes before starting first operation in order to clean the system before using!**
- **Don't turn shower heads to the left. This could loosen the connection between the shower heads and the stand tube and make the spray rinsing unit leaking!**

926001DN



920920



920932D



925947
G ½" FT to NPT ½" MT



910908



910903



910966/910988



920210



920211



920212



910909



910901



920213



920922

LÖLSBERG - Owner Bernd Lölsberg - Otto-Hahn-Straße 9a - 97230 Estenfeld, Germany
Tel. +49 (0) 9305 98978-0 - Fax +49 (0) 9305 98978-88 - www.loelsberg.de - info@loelsberg.de

The i.Scoop*Shower* models
926001DN – 926002DN – 926003DN – 926004DN - 926005DN,
are to be installed with adequate backflow protection
to comply with applicable federal, state, and local codes!

Ensure that all joints and seams in the splash zone are sealed after installation!
Ensure that brass parts are not exposed after installation!









LÖLSBERG - Owner Bernd Lölsberg - Otto-Hahn-Straße 9a - 97230 Estenfeld, Germany
Tel. +49 (0) 9305 98978-0 - Fax +49 (0) 9305 98978-88 - www.loelsberg.de - info@loelsberg.de


926001DN / 926002DN / 926003DN






925947
G ½” FT to NPT ½” MT



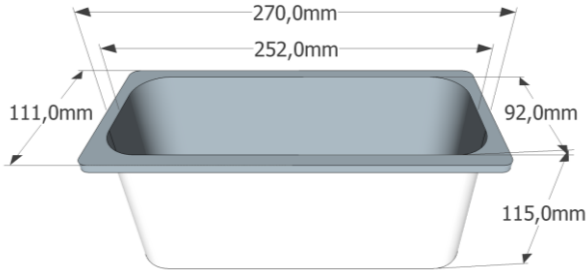




910903

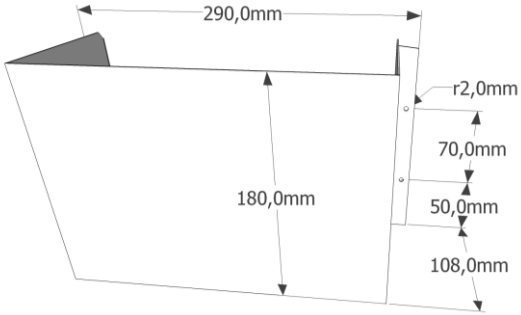




910966




910988

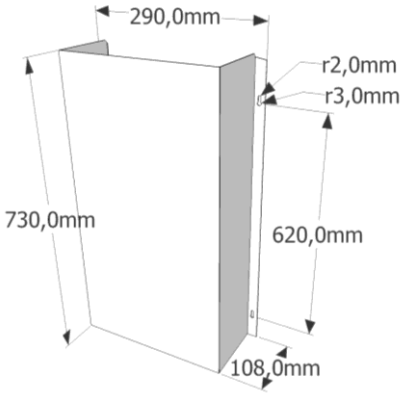


LÖLSBERG - Owner Bernd Lölsberg - Otto-Hahn-Straße 9a - 97230 Estenfeld, Germany
Tel. +49 (0) 9305 98978-0 - Fax +49 (0) 9305 98978-88 - www.loelsberg.de - info@loelsberg.de

926004DN / 926005DN

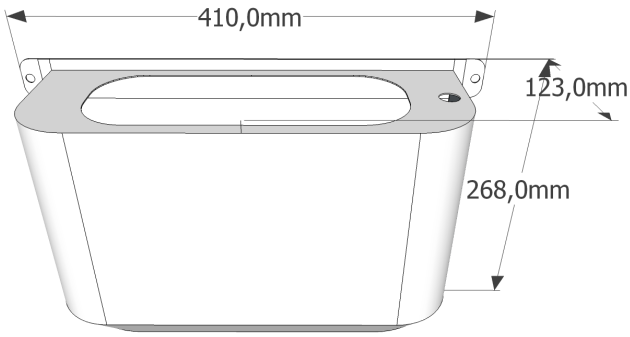



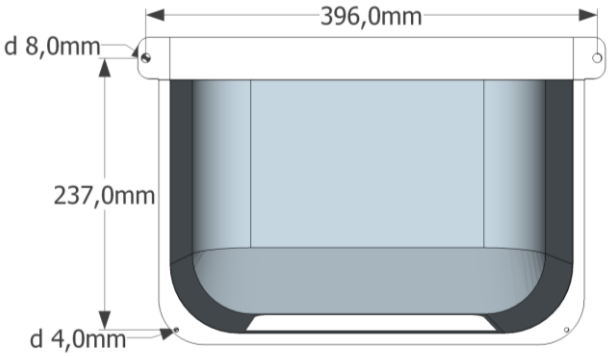



910000



910100



910200



LÖLSBERG - Owner Bernd Lölsberg - Otto-Hahn-Straße 9a - 97230 Estenfeld, Germany
Tel. +49 (0) 9305 98978-0 - Fax +49 (0) 9305 98978-88 - www.loelsberg.de - info@loelsberg.de