Datasheets

UltraVent Plus - Type 6-1/1 iHexagon

Article number

60.77.468

Description



The UltraVent Plus gets rid of the steam emitted with its condensation technology. No connection to the outside or extension of an existing exhaust system is necessary with this air recirculation hoodInstallation is simple, and the hood can be retrofitted at any time.

It is also equipped with special filter technology which reduces lingering smoke, which can build up while grilling and frying.

Intended use

This product is only intended for commercial use, such as in restaurant kitchens or catering operations for schools, hospitals, or delis. Any other use runs counter to its intended purpose, and could be dangerous. Any other use runs counter to its intended purpose, and could be dangerous.

Features

- Intelligent power control with automatic, continuously variable adjustment of the extraction power to the quantity of steam emitted
- Automatically boosts extraction rate when cooking cabinet door is opened
- Reduces lingering steam and vapours. These are extracted and condensed in the hood.
- Wastewater discharged by the device - no additional discharge line needed
- Easy to install and retrofit
- Issue of service notifications on the display
- Easy to clean baffle plate, dishwasher safe
- Special filter technology with a replaceable HEPA main filter to reduce smoke

Technical specifications

Connection:	200V - 240 NAC 1/2 AC
Frequency:	50/60 Hz
Connected load:	140-160 W
Extraction capacity:	0,7 A
Extraction capacity:	705 m^3/h
Operating noise level:	50-65 dB(A)

Dimensions and weights

Width (W):	968 mm
Height (H):	429 mm
Depth (D):	929 mm
Weight:	64 kg

Material

Rust-free stainless steel (CNS 1.4301/AISI 304)

Datasheets

UltraVent Plus - Type 6-1/1 iHexagon


Note


- The condensation effect of the UltraVent condensation hood can significantly reduce the amount of supply and exhaust air required for iCombi appliances.Specific information can be found in the RATIONAL planner's manual. Local standards and regulations for ventilation and air conditioning systems must be observed.
- Only permitted for installation on electrical units
- We recommend maintaining an overhead clearance of at least 450 mm for all cooking systems and Combi-Duos using an UltraVent or an UltraVent Plus
- Not to be used with VarioSmoker
- Only for iHexagon


Approvals


Datasheets

UltraVent Plus - Type 6-1/1 iHexagon

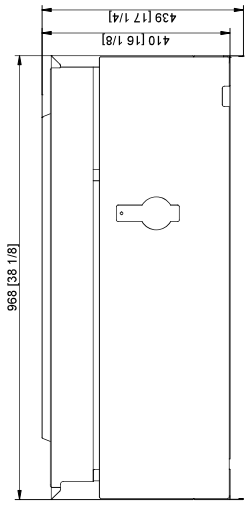

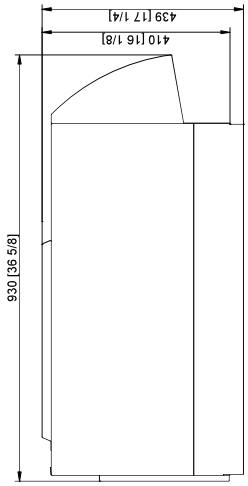

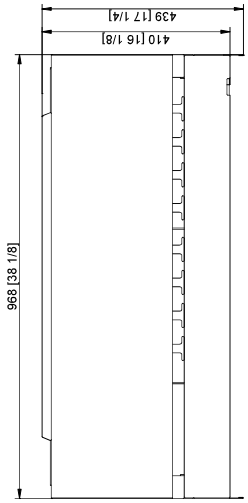

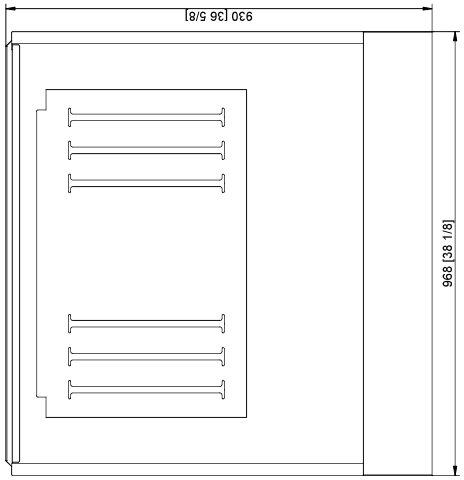

Information/Information/Information									
Zeichnungsausdruck unterliegt nicht dem Änderungsdienst! Printed drawing is not automatically updated La mise à jour n'est pas assurée sur les plans papier!									
©RATIONAL AG 2023									
Revision/Revision/Révision									
Index	Datum/Date/Date	Name/Name/Nom							
1	01.02.2024	J. Schäfer							
2									
3									
4									
5									
6									
7									
8									

Anschlussplan/Connection diagram/Plan de connexion	
UltraVent Plus iHexagon 6-11 (master view)	
Datum/Date/Date	01.09.2023
Ersteller/Creator/Créateur	RATIONAL AG 2023
Maßstab/Scale/Échelle	1:1
Abmessungen/Dimensions/Dimensions	mm [inch]
Nr./Nr.	Beschreibung/Description/Description
1	
2	
3	
4	